


RETRACTABLE GATE

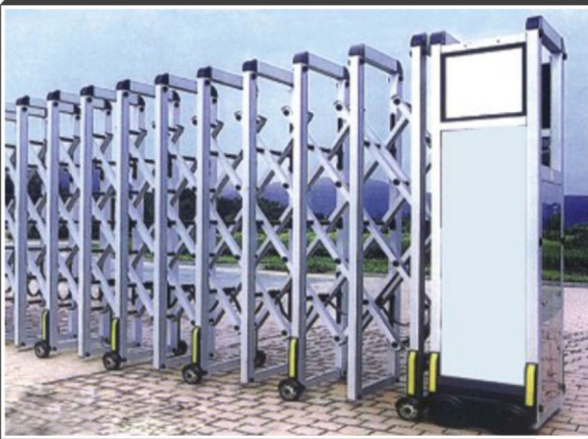

Retractable Gates offered by Toshi stand out amongst others because they blend flawlessly with its surroundings. Toshi Retractable gates are mainly used where large openings are needed. It is made of stainless steel or aluminum. Incorporated with the maximum advanced features, plus intelligent control circuit, a world-leading spiral clutch technology and deluxe details the retractable gates lead the way into the acumen age in the industry. It is harmless, consistent, energy-saving, and offers excessive horsepower and starting stability. It can give up to 77% clear openings. The normal height of these gates are 1~2 meters. The standard height is 1.6 meters.

TECHNICAL DATA

Material dimension	Stainless steel in 0.7 mm thickness	Moving speed	17-19 m/min
Major material	51 mm x 50 mm	Track	No track, single/double track (optional)
Auxiliary material	36 mm x 36 mm	Working temperature	-25 °C to +75 °C
Gate design	R style / S style	Remote control	1 nos. (Inbuilt)
Maximum gate size	W=30 m, H=1.7 m, height over 1.7 m on special order	LED display	Time/monument indicator
Operating voltage	220 V ± 10% 50 Hz	Safety sensor	inbuilt
Motor power	370 W / 550 W	Limit switch	Magnetic / mechanical

Features and Benefits of the operator :

Features	Benefits
High-speed opening & closing	Faster movement of traffic
User friendly interface	Easy to use
Mesh screen	Extra privacy
Trackless operation(optional)	Avoid vehicles damaging rails
Safety	No damages/no accidents